

RKB

BEARING INDUSTRIES



The Swiss Premium Class Bearing Manufacturer

RKB (Roulement, Kugellager, Bearing) is the Swiss bearing manufacturing organization which has been operating in the bearing industry for over 70 years, with a monthly production capacity exceeding 350 tons of machined steel. The experience gained over the years provides RKB with the expertise necessary for the development and manufacture of technological industrial bearings up to 1925 mm outer diameter. RKB offers reliable cost effective solutions, extreme operational flexibility, leading-edge service, huge stock availability, short delivery time and the high, consistent quality of a premium class bearing manufacturer.

With a worldwide distribution network and exports to more than 50 countries, RKB is globally recognized as **"The Alternative Power"** in the bearing industry.


RKB Spherical Roller Bearings

The spherical roller bearings (SRBs) manufactured by RKB are engineered to withstand high radial forces and moderate axial forces acting in both directions. RKB SRBs can dynamically accommodate misalignments due to shaft bending. They are produced with cylindrical or tapered bore, in open or sealed execution. Depending on application requirements, RKB Bainite Hardening Treatment (HB) and High Temperature Dimensional Stabilization (S) can be applied on bearing rings and rollers. Moreover, as for dimensions, RKB spherical roller bearings are manufactured according to ISO/ABMA/GOST specifications. As a consequence, they are fully interchangeable with all the bearings that meet the relevant international standards.



Tailor Made Solutions

Besides the main spherical roller bearing designs, RKB has developed new solutions according to specific application requirements. The special designs include SEALED SRBs, for smooth operation in contaminated environments, ROVSX type, expressly designed for vibratory equipment, WOR execution, suitable for gear output shaft of truck concrete mixers, and SPLIT bearings to make maintenance operations easier at hard-to-reach positions. If duly applied, these special designs are cost effective for the customer, since they allow increased bearing life expectancy and reduced machine downtime.

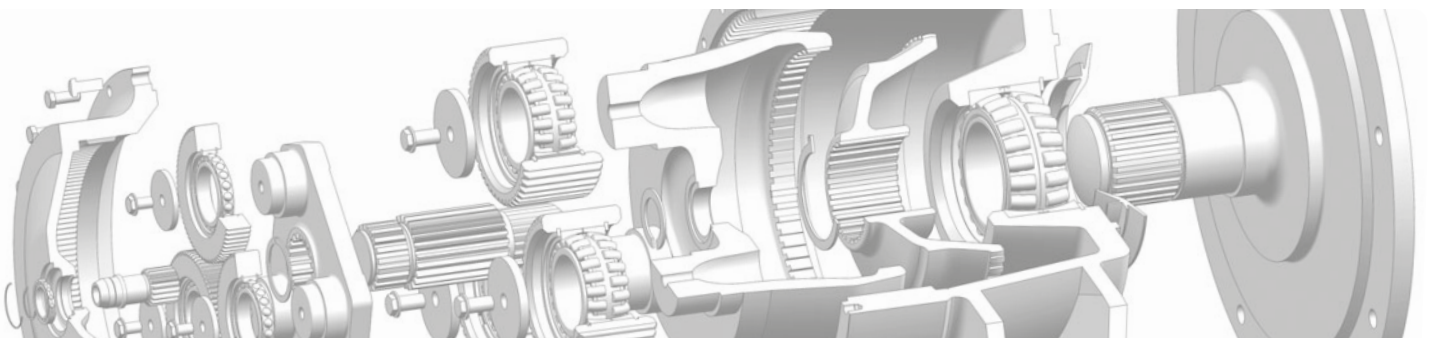


RKB Europe SA
Executive Headquarters and Technological Center

Via Primo Agosto - 6828 Balerna
Switzerland

Phone +41 91 260 09 30 · Fax +41 91 260 09 50
info@rkbEurope.com · www.rkbbearings.com
VAT No. CHE-113.327.770

ENGINEERED IN SWITZERLAND
TECHNOLOGICAL BEARINGS



Special Designs

SEALED type



- Design used for medium and large size bearings operating at medium speeds
- Inner ring with integral side ribs
- Symmetrical roller profile
- One-piece double pronged machined brass cage with integral slinger guided on the inner ring
- Integral rubber seals on both bearing sides for harsh working conditions (2CZ)
- Lubrication groove and holes in the outer ring
- Available with plugged lubrication holes in the outer ring (W77)
- Available with two-piece window type pressed steel cage guided on the inner ring


HB
BAINITE HT

S
STABILIZATION

T
TOUGH ROLLER

V
VICTORY LINE

ROVSX type



- Design used for vibratory equipment
- Inner ring with integral side ribs
- Symmetrical roller profile
- Two-piece machined brass cage guided on the outer ring
- Radial internal clearance higher than normal CN
- Running accuracy higher than standard execution
- Available with lubrication groove, three lubrication holes in the outer ring and six lubrication holes in the inner ring (W513)


HB
BAINITE HT

S
STABILIZATION

T
TOUGH ROLLER

ROVSX

WOR type




- Design used for gear output shaft of truck concrete mixers
- Inner ring with integral central rib
- Symmetrical or asymmetrical roller profile
- Two-piece pressed steel window type cage guided on the inner ring
- Wider outer ring (WOR) in one piece or split into two halves
- Permissible misalignment greater than standard execution
- Available with two-piece machined brass cage guided on the inner ring

O+
OPTIMIZED

HB
BAINITE HT

S
STABILIZATION

SPLIT type




- Design used for medium and large size bearings
- Wider inner ring with integral side ribs
- Symmetrical roller profile
- Two-piece bolted double pronged machined brass cage guided on the inner ring
- Engineered for hard-to-reach positions (e.g. bucket wheel excavators)
- Design for facilitated mounting, dismounting and maintenance, and reduced machine downtime

HB
BAINITE HT

S
STABILIZATION

ECES type



- Design used for small to medium size bearings
- Ribless inner ring
- Symmetrical roller profile
- Two-piece pressed steel window type cage with slotted open face to improve lubricant flow and separated slinger guided on the inner ring
- Lubrication groove and six holes in the outer ring (W33X)
- Suitable for harsh environments
- Available with lubrication groove, three lubrication holes in the outer ring and six lubrication holes in the inner ring (W513)

E-TYPE

HB
BAINITE HT

S
STABILIZATION

T
TOUGH ROLLER

V
VICTORY LINE



RKB Europe SA
Executive Headquarters and Technological Center
Via Primo Agosto - 6828 Balerna
Switzerland

Phone +41 91 260 09 30 · Fax +41 91 260 09 50
info@rkbeurope.com · www.rkbbearings.com
VAT No. CHE-113.327.770

ENGINEERED IN SWITZERLAND
TECHNOLOGICAL BEARINGS

